

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 March 2004 (18.03.2004)


PCT

(10) International Publication Number
WO 2004/023135 A1

- (51) International Patent Classification⁷: **G01N 33/00**
- (21) International Application Number:
PCT/GB2003/003432
- (22) International Filing Date: 5 August 2003 (05.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0220461.8 3 September 2002 (03.09.2002) GB
- (71) Applicants (for all designated States except US): **ZELL-WEGER ANALYTICS LIMITED** [GB/GB]; Hatch Pond House, 4 Stinsford Road, Nuffield Estate, Poole, Dorset BH17 0RZ (GB). **INFITRON, INC.** [KR/KR]; 13F, Ace Twin-Tower 1, 212-1, Guro3-dong, Seoul, 152-848 (KR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **HONG, Soon, Ho** [KR/KR]; Mok-Dong Sinsigagi Apt. 1325-701, Sinjung-Dong 328, Yangchun-Gu, Seoul, 158-070 (KR). **JIN, Je, Yong** [KR/KR]; Samsung jangmi Apt. 1142-1004, Sanbon-Dong, Gunpo-City, Keungi-Do, 435-040 (KR).
- (74) Agents: **HEDLEY, Nicholas, James, Matthew et al.**; Kilburn & Strode, 20 Red Lion Street, London WC1R 4PJ (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: GAS SUPPLY ADAPTER

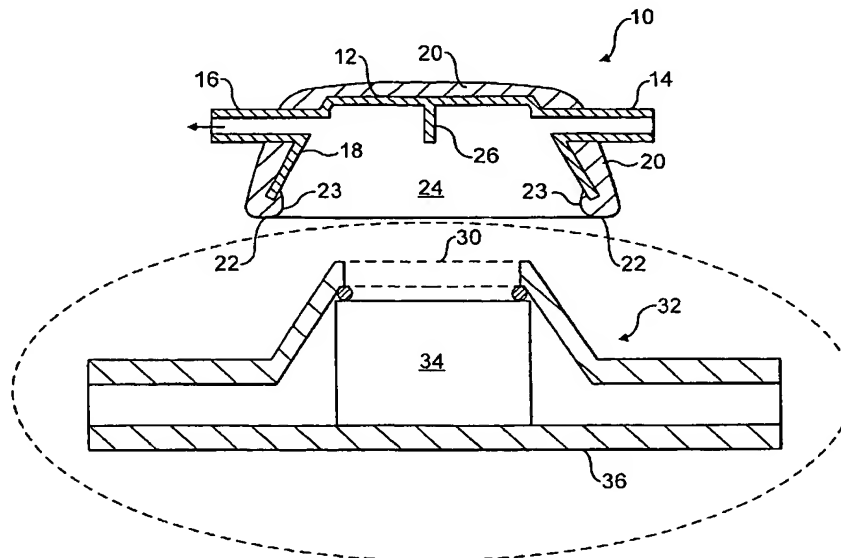

(57) Abstract: A single-piece adapter (10) is disclosed for supplying gas to a gas detector (32) that contains at least one gas sensor (34) and that has a gas inlet (30) for allowing gas at the inlet to come into contact with the at least one sensor (34), which adapter comprises: a chamber (24) having an opening formed by a rim (22) for fitting over the gas inlet of a gas detector (32), the chamber having an inner surface (18), an inlet duct (14) for feeding gas into the chamber in a direction transverse to the opening, and an outlet (16) to vent gases from within the chamber. The inner surface (18) of the chamber is formed by a first moulding (12) of a rigid, non-absorbent material and a second moulding (20) of resilient material. The second moulding forms the rim (22) for providing a gas-tight seal between the adapter (10) and the detector (32).

WO 2004/023135 A1

WO 2004/023135 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Gas Supply Adapter

Technical Field

The present invention relates to the calibration of gas sensors and especially to
5 an adapter for calibrating gas sensors, notably gas sensors in portable gas
detectors (which term will be used for instruments for detecting or analysing
gas or vapours). However, the present invention also extends to calibration
adapters for fixed-installation gas detectors and to adapters for supplying
samples of gas to a sensor for analysis or detection of gases present in an
10 atmosphere, especially toxic gases and oxygen.

Gas detectors are used, for example, to detect or analyse potentially hazardous
gases or vapours, e.g. hydrogen sulphide (H₂S), carbon monoxide (CO) and
nitric oxides, and also oxygen and it is important that such instruments are
15 correctly calibrated in order to provide accurate readings.

Background Art

Gas detectors containing electrochemical gas sensors are well known for
monitoring potentially hazardous environments, for example mines, tunnels,
20 sewers and other closed environments. Such detectors are generally of the type
in which gas from the atmosphere diffuses into contact with one or more
sensors within a detector. Electronic circuits within the detector convert the
output signal from each sensor into a reading of the amount of gas detected.
The sensor output signal can drift and can also vary with the age of the sensor
25 and hence periodic calibration is required to ensure that the detector output is
accurate.

Safety regulations require that the sensors within a detector are tested on each
occasion that they are taken into a potentially hazardous environment and that

- they are calibrated periodically according to the manufacturers' recommendations. Currently, such gas detector sensors are calibrated by passing a calibration gas of known composition from a compressed gas bottle at a predetermined flow rate through a pipeline to an adapter that fits over the gas inlet of the detector, i.e. the inlet in the detector that allows gas from the atmosphere being monitored to diffuse into contact with the sensors. Generally an excess of calibration gas is supplied to the adapter and a vent is provided to atmosphere in order to prevent the pressure in the adapter from building up.
- 10 An example of a calibration adapter is disclosed in US 4,854,153 in which a gas detector is shown that is pressed against a calibration adapter and sealed thereto by an O-ring. Gas is fed into a chamber within the adapter that is in contact with the gas inlet of the detector; an outlet vent is also provided from the chamber.
- 15 GB 2 345 340 discloses a hood for surrounding a wall-mounted gas detector for providing an isolated environment into which calibration gas is fed.
- 20 EP 0 319 933 discloses a calibration valve for an oxygen sensor in a respiratory gas system.
- US 4,742,708 describes a calibration cap that is attached to a sensor by hook and loop fabric, e.g. Velcro® fabric.
- 25 US 6,282,940 describes a device for testing carbon monoxide sensors, including a housing made of clear plastic that fits over the carbon monoxide detector.

Calibration adapters should provide the calibration gas to the sensors in a way that mimics as closely as possible the diffusion of gas that occurs during normal operation of the detector when monitoring an open atmosphere.

5 One problem associated with calibration adapters is that they should use a compliant material to provide a good seal against the gas detector to prevent extraneous atmospheric gas from entering the chamber within the calibration adapter. On the other hand, compliant material, e.g. natural rubber, can both absorb elements within the calibration gas (and so reduce the amount of that
10 component in the calibration gas) and also be degraded by some components of calibration gases. Inert compliant materials are known but they tend to be expensive.

15

Disclosure of Invention

According to the present invention, there is provided a single-piece adapter for supplying gas to a gas detector that contains at least one gas sensor and that has a gas inlet for allowing gas at the inlet to come into contact with the at least one
20 sensor, which adapter comprises:

- a chamber having an opening for fitting over the gas inlet of a gas detector, the chamber having an inner surface,
- an inlet duct for feeding gas into the chamber in a direction transverse to the opening, and
- 25 • an outlet to vent gases from within the chamber,

wherein the inner surface of the chamber is formed by a first moulding of a rigid, non-absorbent material and a second moulding of resilient material and wherein the second moulding forms the part of the surface surrounding the said opening.

The interface between the first and the second mouldings may be arranged to engage the gas detector form a seal isolating the chamber from the ambient atmosphere.

5

Because the resilient material is provided only around the lower part of the inner surface surrounding the opening, while the rest of the inner surface of the chamber is formed from the first moulding, only a very limited amount of the second moulding is exposed to the calibration gas in the chamber and preferably only the edge of the interface between the first and second mouldings is exposed to the gas within the chamber. Thus the vast majority of the inner surface of the adapter chamber is provided by the hard non-absorbent plastics material of the first moulding and accordingly the amount of gas that can be absorbed by, or that can degrade, the resilient material is minimal. In addition, the resilient material provides a good gas-tight seal merely by placing the adapter on the gas detector without having to apply pressure to the adapter to keep it in contact with the gas detector.

10

15

20

In addition to providing calibration, adapters can also be used to supply a sample of gas to a gas detector from an atmosphere being monitored.

Preferably, the gas inlet duct and gas outlet are in line with each other and a baffle is provided between the inlet and the outlet to prevent gas passing directly from the inlet to the outlet.

25

In order to prevent build up of pressure within the adapter chamber, the cross sectional area of the outlet is preferably greater than the cross sectional area of the inlet duct. The outlet may be a simple opening to atmosphere or may be a duct for removing possibly toxic material and hence preventing the immediate

atmosphere surrounding the gas detector from being filled with toxic calibration gas.

5 The second moulding of compliant material preferably extends over the whole of the outer surface of the adapter and the adapter is preferably formed by over-moulding the first moulding with the second moulding.

The present invention also provides a method of using the adapter to feed gas to a detector.

10

Brief Description of Drawings

A calibration adapter in accordance with the present invention will now be described, by way of example only, with reference to the accompanying drawings in which:

15

Figure 1 is a schematic view showing the operation of the adapter of the present invention;

Figure 2 is a picture of the adapter of the present invention;

Figure 3 is a picture showing the inside of the adapter of Figure 2;

20

Figure 4 is a picture of the two parts of the moulding making up the adapter of Figures 2 and 3; and

Figure 5 is a picture similar to Figure 4 but showing the inside of one of the parts of the moulding.

25

Preferred Mode for Putting the Invention into Operation

Referring initially to Figure 1, there is shown a schematic cross section of the adapter 10, which includes a first moulding 12 (shown by thick black lines) formed of an inert rigid plastic that does not absorb gas, e.g. ABS. It includes

an inlet 14 and an outlet 16 for calibration gas. The first moulding 12 has a skirt 18.

The first moulding 12 is incorporated into a further mould and a second moulding 20 is made around the first moulding. The second moulding surrounds the outer surface of the first moulding, forms a bottom rim 22 of the adapter and extends part of the way up the internal surface of the skirt 18.

Thus, the adapter has an internal chamber 24 that can be supplied with calibration gas through inlet 14 and vented through outlet 16. In order to avoid pressure building up in the chamber 24, the cross sectional area of the outlet 16 is greater than the cross sectional area of the inlet 14. The inlet 14 is connected by a hose (not shown) to a source of compressed calibration gas via a valve (not shown) providing a constant flow of gas. The inlet and outlet 14, 16 are arranged in line transversely to the open bottom face of the adapter formed by rim 22. The inlet and outlet are provided in line and in order to prevent gas flowing directly from the inlet to the outlet, a baffle 26 is provided that causes gas passing through the inlet to circulate within the chamber 24 and hence diffuse to a calibration sensor, as described later. Such an arrangement prevents calibration gas being directly directed onto the sensor, which could give rise to inaccurate sensor readings.

The calibration cap 10 is designed to fit over a gas aperture 30 in a gas detector housing 32. The gas aperture is in gaseous contact with a sensor 34 seated on the printed circuit board 36 within the detector; the printed circuit board 36 receives signals from the sensor and processes them to give an output in accordance with the amount of gas detected by the sensor.

The internal face of the skirt 18 is designed to fit over the detector housing 32. The second moulding that forms the rim 22 and extends part of the way up the internal surface of the skirt 18 provides a gas-tight seal against the detector housing 32 without having to apply external pressure to the adapter 10.

5 However, clips or other devices that keep the adapter 10 fast against the detector housing 32 can be provided if desired.

Because only the edge 23 of the second moulding 20 is in contact with the atmosphere within the chamber 24 containing calibration gas, the soft
10 compliant rubber of the second moulding has little capacity for absorbing calibration gas. The inner surface of the chamber 24 that contacts the calibration gas is otherwise formed by the first moulding 12, which cannot absorb the calibration gas.

15 An adapter is shown in Figures 2 to 5; the first moulding is shown in a grey colour and the second moulding in black. As can be seen from Figure 2, the inlet and outlet 14, 16 are formed from the first moulding but otherwise the whole of the external surface of the adapter is formed of the second moulding 20, apart from an arrow 40, which shows the direction of gas flow within the
20 adapter from the inlet 14 to the outlet 16. The inside of the adapter is shown in Figure 3. As can be seen, the second mould extends up the side wall 18 of the first moulding. The edge 29 of the second moulding will rest against the detector housing 32 and so only the edge 29 of the said moulding is exposed to calibration gas. The baffle 26 is also clearly visible between the inlet and outlet
25 14, 16.

Because the inlet and outlet 14, 16 are formed by the rigid plastic material of the first moulding, it is relatively easy to push a tubing onto the inlet and outlet.

If the calibration gas is toxic, then the tubing attached to the outlet 16 can conduct the gas away for safe method disposal.

5 As can be seen in Figure 5, the diameter of the outlet 16 is substantially larger than the diameter of the inlet 14 in order to allow unrestricted flow of calibration gas from out of the chamber 24 to prevent pressure build up in the chamber, which could effect the calibration results.

10 It should be appreciated that the moulding parts shown in Figures 4 and 5 do not ever exist independently since they are made in a two-part moulding process as described.

15 Because a rigid plastic is used as the first moulding, which provides a skeleton to the calibration adapter, the calibration adapter retains its shape well and provides consistent sealing to a detector during calibration. The skeleton configuration also makes the handling of the detector easier. On the other hand, the compliant, resilient, second moulding provides compliant sealing against the detector housing and can also adapt to minor dimensional variations in the detector housing. Furthermore, the compliant second moulding means
20 that there is no mechanical damage or scratching to the detector housing while the adapter is mounted or dismounted.

CLAIMS

1. A single-piece adapter for supplying gas to a gas detector that contains at least one gas sensor and that has a gas inlet for allowing gas at the inlet to come into contact with the at least one sensor, which adapter comprises:
- 5
- a chamber having an opening for fitting over the gas inlet of a gas detector, the chamber having an inner surface,
 - an inlet duct for feeding gas into the chamber in a direction transverse to the opening, and
 - 10 • an outlet to vent gases from within the chamber,
- wherein the inner surface of the chamber is formed by a first moulding of a rigid, non-absorbent material and a second moulding of resilient material and wherein the second moulding forms the part of the surface surrounding the said opening.
- 15
2. An adapter as claimed in claim 1, wherein the interface between the first and the second mouldings on the inner chamber wall is arranged to engage the gas detector to form a seal isolating the chamber from the ambient atmosphere.
- 20
3. An adapter as claimed in claim 1 or claim 2, wherein only the edge of the interface between the first and second mouldings is exposed to the gas within the chamber.
- 25
4. An adapter as claimed in any preceding claim, wherein the gas inlet duct and the gas outlet are in line with each other and a baffle is provided between the inlet duct and the outlet to prevent gas passing directly from the inlet to the outlet.

5. An adapter as claimed in any preceding claim, wherein the cross sectional area of the outlet is greater than the cross sectional area of the inlet duct.
- 5 6. An adapter as claimed in any preceding claim, wherein the second moulding of compliant material extends substantially over the whole of the outer surface of the adapter, except for the inlet duct and the outlet.
7. An adapter as claimed in any preceding claim, wherein the second moulding is an over-moulding of the first moulding.
- 10 8. A method of supplying gas to a gas detector that contains at least one gas sensor and that has a gas inlet for allowing gas at the inlet to come into contact with the at least one sensor, which method comprises providing an adapter that comprises a chamber having an opening, a gas inlet duct and an outlet, placing the opening of the adapter over the gas inlet of the gas detector to form a seal between the adapter and the detector to isolate the chamber from the atmosphere, wherein the inner surface of the chamber is formed by a first moulding of a rigid, non-gas absorbent material and a second moulding of resilient material, the second moulding forming the part of the surface surrounding the said opening.
- 15 9. A method as claimed in claim 8, wherein the interface between the first and the second mouldings on the inner chamber surface engages the gas detector to form the seal isolating the chamber from the ambient atmosphere.
- 20 10. A method as claimed in claim 9, wherein only the edge of the interface between the first and second mouldings is exposed to the gas within the chamber.
- 25

11. A method as claimed in any of claims 8 to 10, wherein the gas inlet duct and the gas outlet are in line with each other and a baffle is provided between the inlet duct and the outlet to prevent gas passing directly from the inlet to the outlet.
- 5

1/4

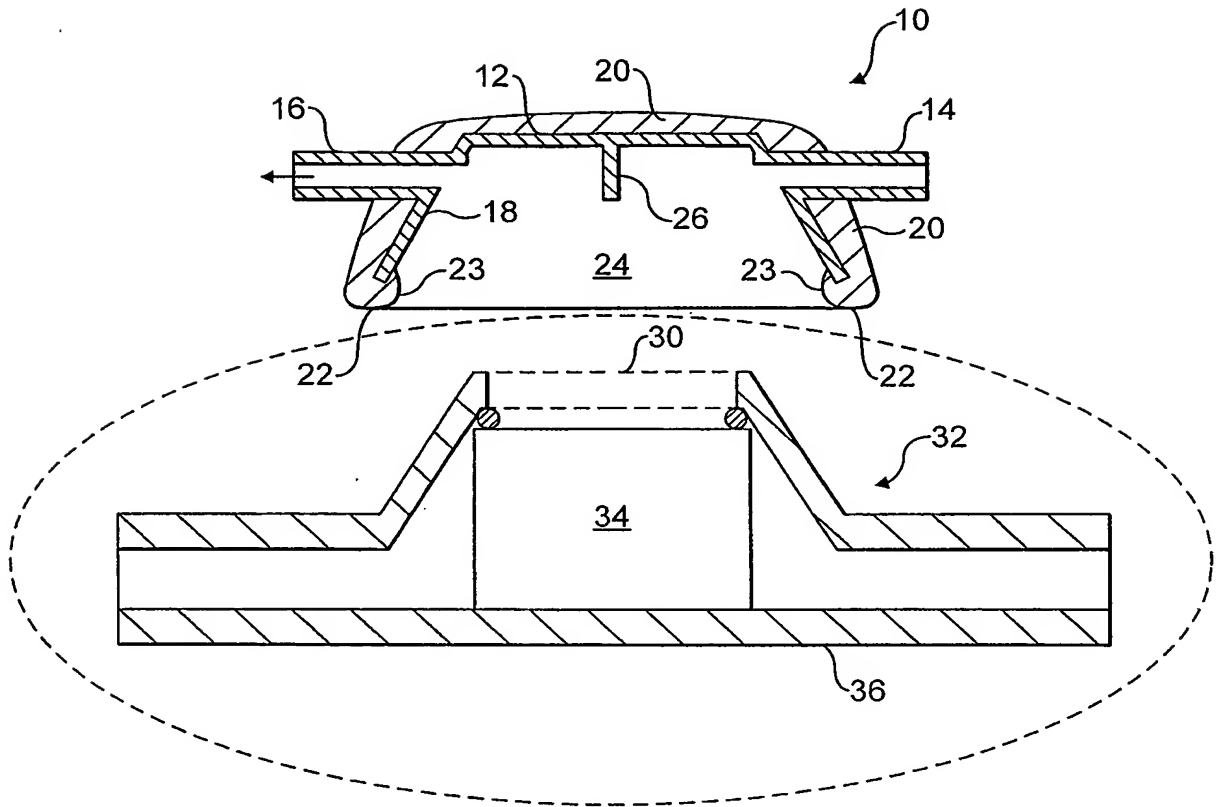


FIG. 1

2/4

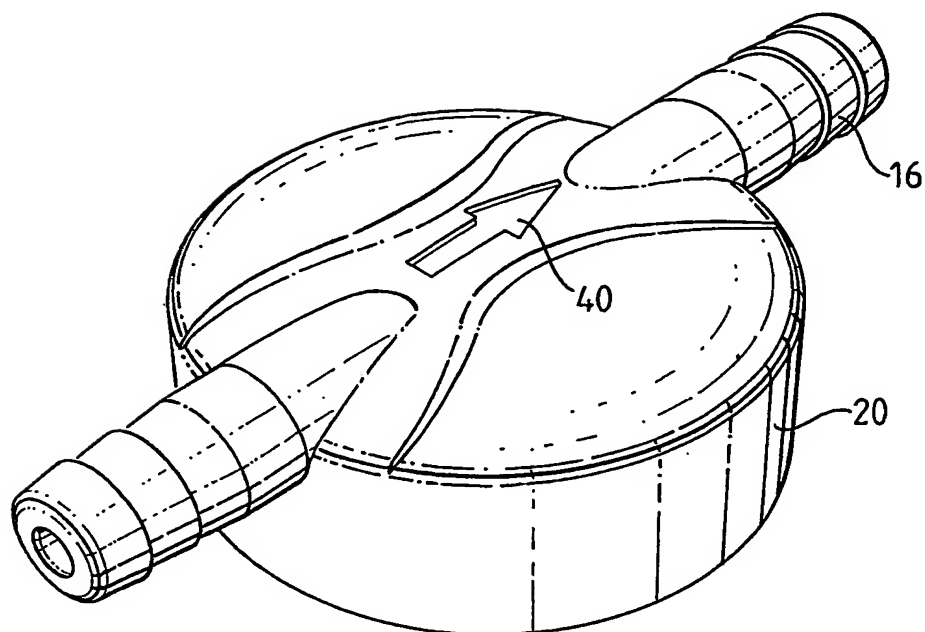


FIG. 2

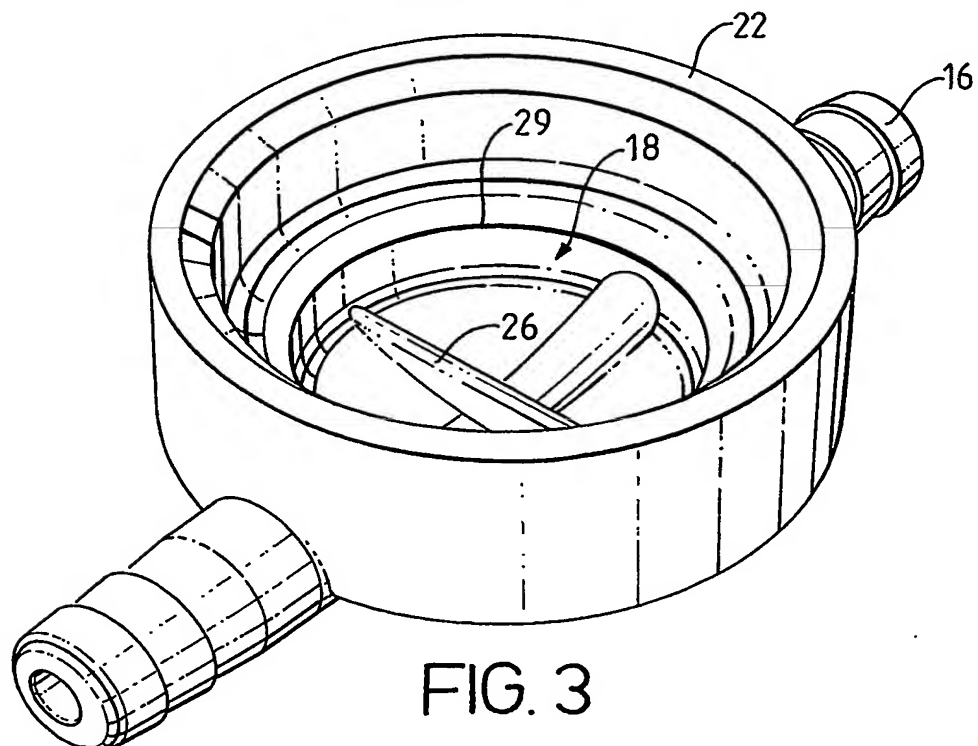


FIG. 3

3/4

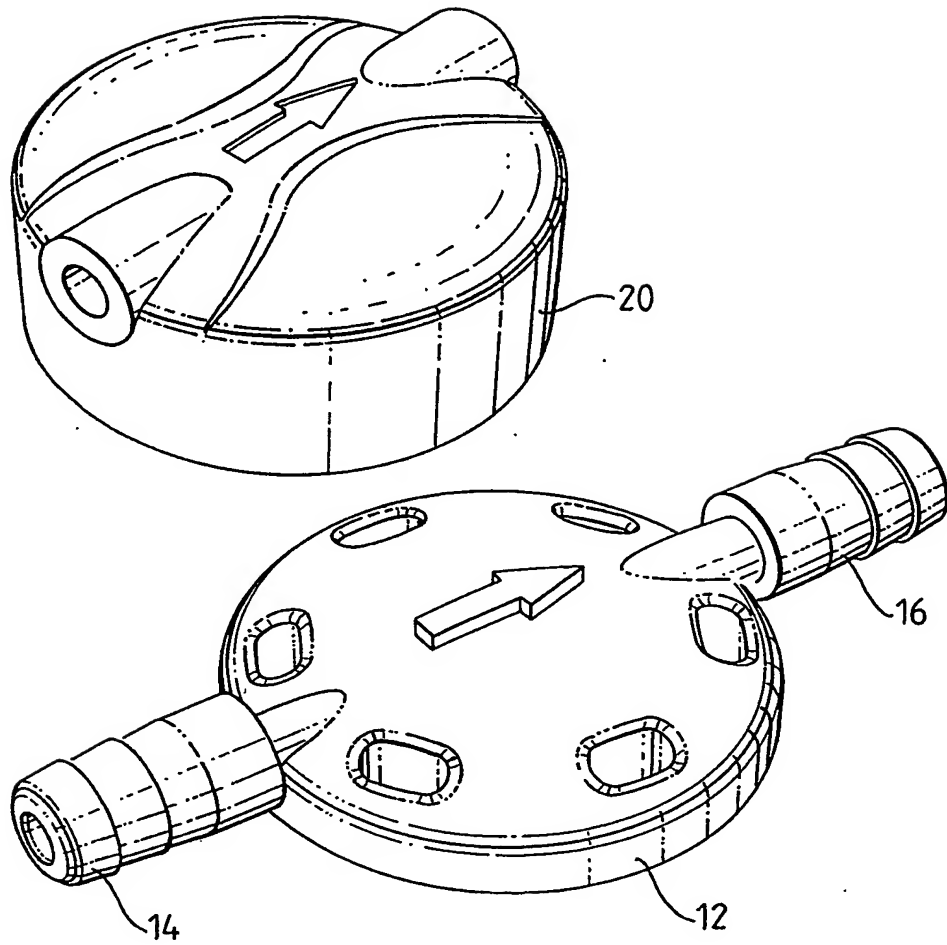


FIG. 4

4/4

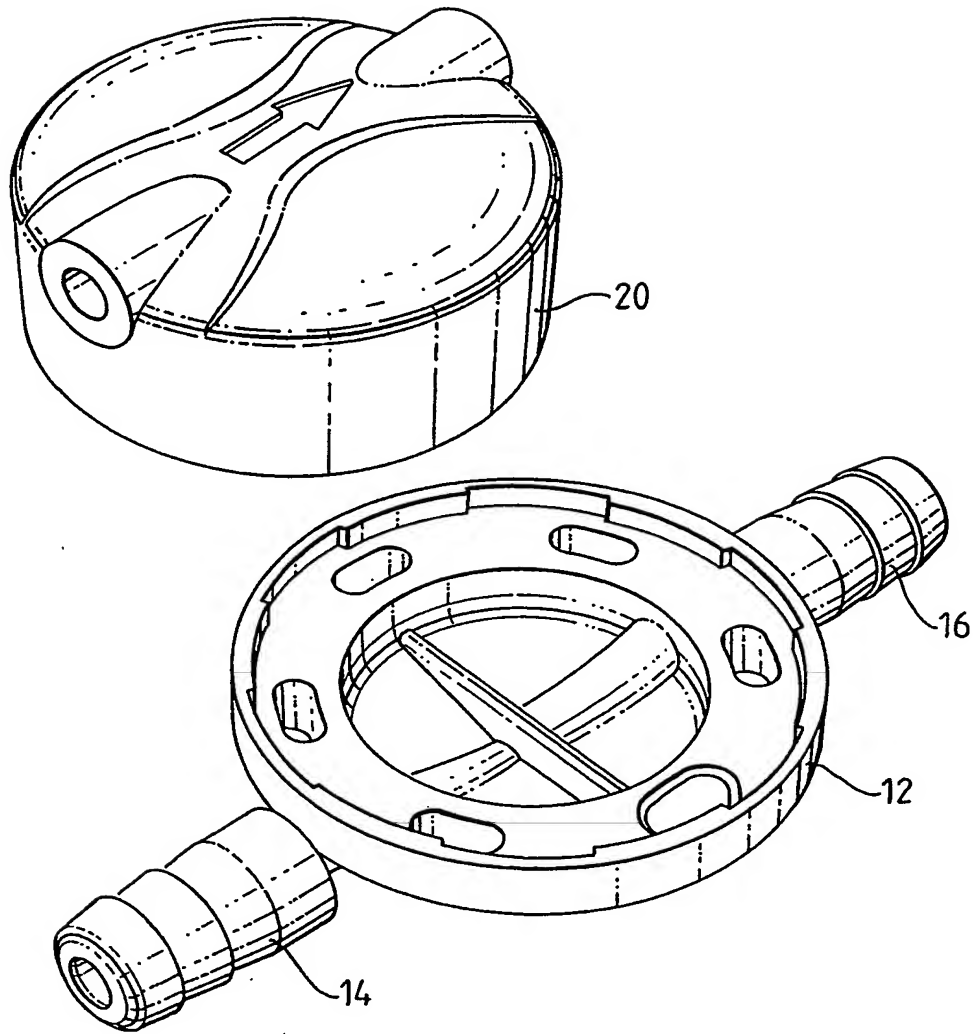


FIG. 5

INTERNATIONAL SEARCH REPORT

Internal Application No
PCT/GB 03/03432

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G01N33/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	EP 0 811 841 A (ENDRESS + HAUSER CONDUCTA GESELLSCHAFT FÜR MESS- U. REGELTECHNIK) 10 December 1997 (1997-12-10) column 7, line 30 -column 8, line 53 column 12, line 47 -column 14, line 36; figures 3,15-19	1-3,5, 8-10 4,6,7,11
Y A	GB 2 371 860 A (STONES J M) 7 August 2002 (2002-08-07) page 5, line 25 -page 9, line 8; figures	1-3,5, 8-10 6,7
A	EP 1 031 833 A (NGK SPARK PLUG CO) 30 August 2000 (2000-08-30) paragraph '0051! - paragraph '0054!; figure 6	1-4,8-11
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

4 November 2003

Date of mailing of the international search report

12/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Johnson, K

INTERNATIONAL SEARCH REPORT

Internationa l Application No
PCT/GB 93/03432

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 319 933 A (DRAEGERWERK) 14 June 1989 (1989-06-14) cited in the application column 3, line 46 -column 5, line 13; figures -----	1-3, 8-10

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0811841	A	10-12-1997	EP 0811841 A1	10-12-1997
			CA 2207117 A1	06-12-1997
			JP 10068711 A	10-03-1998
GB 2371860	A	07-08-2002	NONE	
EP 1031833	A	30-08-2000	JP 2000241382 A	08-09-2000
			EP 1031833 A2	30-08-2000
			US 6453723 B1	24-09-2002
EP 0319933	A	14-06-1989	DE 3741454 A1	22-06-1989
			EP 0319933 A2	14-06-1989